

# Dankoff Solar Force™ Piston Pump



## 3000 Series

Use solar-electric power for water lift or pressurizing from shallow water sources. Provides as much as 5600 Gallons per day (21,000 ltrs.) pushing as high as 230 Feet (70m) or 100 PSI (7 kg/sq. cm)

*Solar Force Piston Pump* draws water from a shallow well, spring, pond, river or tank. It can push water uphill and over long distances for home, village, irrigation or livestock uses. It can use power directly from a photovoltaic array, or from storage batteries, to fill a storage tank or to pressurize water.

### Solar Force is . . .

**Ultra-Efficient:** Uses less power than ANY other pump in its range

**Economical:** Reduces power system cost by 25–75% compared to centrifugal or AC pumps

**Solar-Direct Application:** Starts pumping in low light conditions


**Pressurizing Application:** DC version is most efficient. AC version uses a low-surge PM motor that greatly reduces starting surge, inverter size, and wire size requirements (when compared to conventional AC pumps).

**Rugged and Reliable:** Proven design with a 20-year life expectancy. Simple to maintain with common tools (5-10 yr. maintenance interval)

**Good Tolerance for dirt and dry run**

**Mechanical Drive** allows engine or hand-lever backup

**Illustrated Instruction Manual** makes it easy for anyone to install and service, with no previous experience.

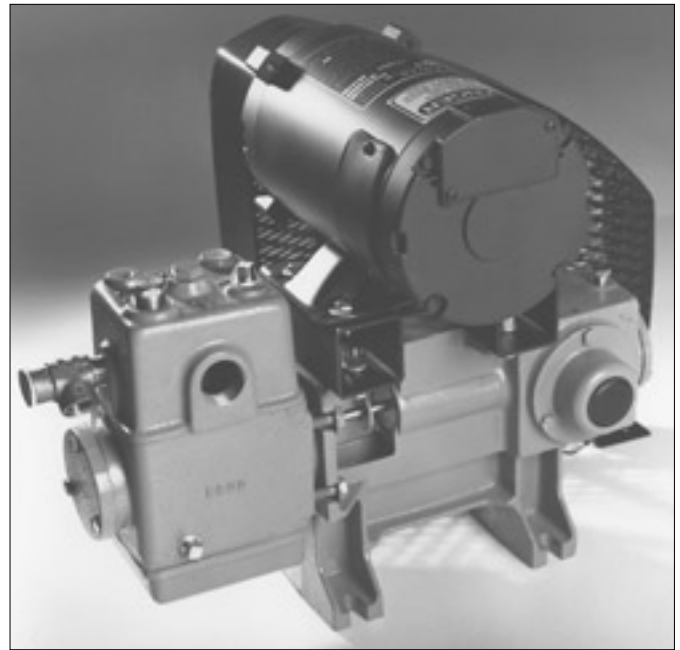

Disassembled pump showing the major parts

*"We have one [Solar Force] pump that serves a community of 30 people and visitors. It more than adequately meets our needs."*

Brother Philip, Christ in the Desert Monastery, Abiquiu, New Mexico

*"I want to tell you how happy I am with our Solar Force Piston Pump. What a workhorse! Gallon for gallon, the price of the pump is well worth it in quality and performance."*

R.S., Molokai, Hawaii

*"Nothing will pump more water per watt than the Solar Force—Nothing! And, it's built like a tank. I've seen similar pumps 50 years old, still working."*

Larry Elliot, Solar Tech, Bonanza, Oregon

**Dankoff Solar Products, Inc.**  
Solar Pump Manufacturing Since 1983  
[www.dankoffsolar.com](http://www.dankoffsolar.com)





**3000 Series**

# Dankoff Solar Force™ Piston Pump

V = Voltage • Specify 12, 24, 48, 90 115ac, 230ac

Total Vertical Lift				Model # 3010 -V- B			Model # 3020 -V- B or PV			Model # 3040 -V- B or PV		
Feet	Meters	PSI	kg/ sq.cm	GPM	lpm	Watts	GPM	lpm	Watts	GPM	lpm	Watts
20	6.1	8.7	0.61	5.9	22.3	77	5.2	19.7	110	9.3	35.2	168
40	12.2	17.4	1.22	5.6	21.3	104	5.2	19.7	132	9.3	35.2	207
60	18.3	26	1.83	5.3	20.2	123	5.1	19.3	154	9.2	34.9	252
80	24.4	35	2.44	5.0	19.7	152	5.1	19.3	182	9.2	34.9	286
100	30.5	43	3.05	5.1	09.2	171	5.0	18.9	202	9.1	34.5	322
120	36.6	52	3.66	4.9	18.7	200	5.0	18.9	224	9.1	34.5	364
140	42.7	60	4.27	4.9	18.7	226	5.0	18.9	252	9.1	34.5	403
160	48.8	70	4.88	Specifications vary ± 10%			4.9	18.6	269	PV models are measured at 14, 28, or 56V (array-direct)		
180	54.9	78	5.49				4.9	18.6	280			
200	61.0	87	6.10				4.8	18.2	308			
220	67.1	96	6.71				4.7	17.8	314			

### Reading the Chart

- Total Lift = Vertical Distance from surface of the water source to the pipe outlet or top of storage tank
- Model Designation: V=Voltage, B=Battery Model, PV=PV Array-Direct Model

### Voltages Available

- 12, 24, 48, 90 VDC
- Note: PV-Direct full working voltage is typically 20% higher than nominal (example: 29 Volts for a 24V system)
- 115V or 230V AC, 50-60Hz

### Suction Capacity

- 25 vertical feet (7.6m) at sea level. Subtract 1 foot for every 1000 ft. elevation (1m for every 1000m). Suction capacity may be further limited by intake pipe friction. Intake piping should be minimum 1" (3010, 3020 models) or minimum 1-1/4" (3040). For best reliability, place the pump as close to the water source as possible.

### Construction

- Cast iron body
- Brass cylinder and valve seats
- Leather cup piston seals
- Neoprene valve seals
- Oil-bath crankcase with special oil included
- Gear (timing) belt drive on PV models
- Standard V-belt on B models
- Pressure relief valve
- Permanent Magnet DC Motor

### System Requirements

- **Solar-Direct Systems:** Chart indicates power (watts) required at the pump. The rated power of the PV array must exceed this number by 20% or more. A pump controller (linear current booster) is required for the pump to start and run in varying light conditions. A solar tracker may be used to increase daily yield (40-55% in summer).
- **Pressurizing Systems:** Battery power system, pressure switch, and pressure tank of minimum 60 gallon (230 liter) size (captive-air tank, available locally)

### Accessories

- **Foot Valve:** 1-1/4" (required if pump is placed higher than water source)
- **Easy Installation Kit:** (for pressurizing applications) Heavy duty pressure switch, pressure gauge, check, drain and shut-off valves, and tank tee (manifold)
- **Pressure Switch:** Heavy duty DC rated, for pressurizing systems
- **Surge Tank:** Absorbs pulsation if long piping is required between pump outlet and tank (included with PV models)
- **Seal & Belt Kit:** Spare gaskets, rod and valve seals, two sets of piston seals, and a belt
- **Long-Term Parts Kit:** The above, plus a second belt, motor brushes, cylinder sleeve, 2 oil changes

### Fittings

- Intake: 1-1/4" female pipe thread
- Outlet: 1" female pipe thread

### Dimensions

- 22 X 13 X 16" high (56 X 33 X 41 cm)
- With Surge Tank, total height 26" (60 cm)
- Weight, max. 80 lbs (36 kg)
- Shipped in 2 or 3 parcels

### Warranty

- 2 years against defects in materials and workmanship

## Other Dankoff Solar Pumps™

**for lift and pressurizing of surface water:**

- Flowlight™ Booster Pump*
- Solar Slowpump™*
- Solar Centrifugal™*
- Solaram™ Surface Pump*

**for deep wells:**

- SunRise® Submersible*

### Available From:

